


LEGEND

- A. 12AWG (19X 25AWG) SILVER PLATED COPPER
 B. SEMI CON SILICONE TO $\phi.140$
 C. SILICONE RUBBER TO $\phi.420 \pm 0.015$

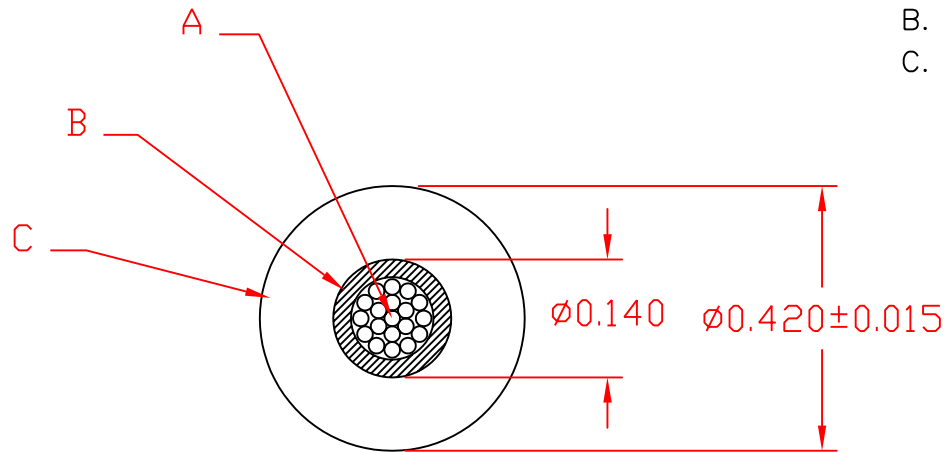

REVISIONS

THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE THE PROPERTY OF DIELECTRIC SCIENCES, INC AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT PERMISSION.

| | | | | | | | | | | | |
|-----|-----------------|------|------|---|--|---------------------|-----------------|---------------------------------|-------------------|-----------------------------|-----|
| REV | ECO NUMBER | APPD | DATE | UNLESS OTHERWISE SPECIFIED | | DRAWN D. ABDULKY | DATE 06FEB09 | DIELECTRIC SCIENCES,INC | | | |
| — | RELEASE DRAWING | | | DIMENSIONS ARE IN INCHES TOLERANCE ON | | CHECKED | DATE | CHELMSFORD, MASSACHUSETTS 01824 | | | |
| | | | | DECIMALS | | APPROVED | | DATE | | CABLE: 1/C #12 AWG ; 80KVDC | |
| | | | | ANGLES | | MATERIAL | | | | | |
| | | | | CONCENTRICITY .005 TIR REMOVE BURRS & SHARP EDGES ALL MACHINE SURFACES 125✓ | | FINISH | | SIZE A | FSCM NO. 50509 | DWG NO. 2229 | REV |
| | | | | | | | | SCALE | | SHEET | OF |