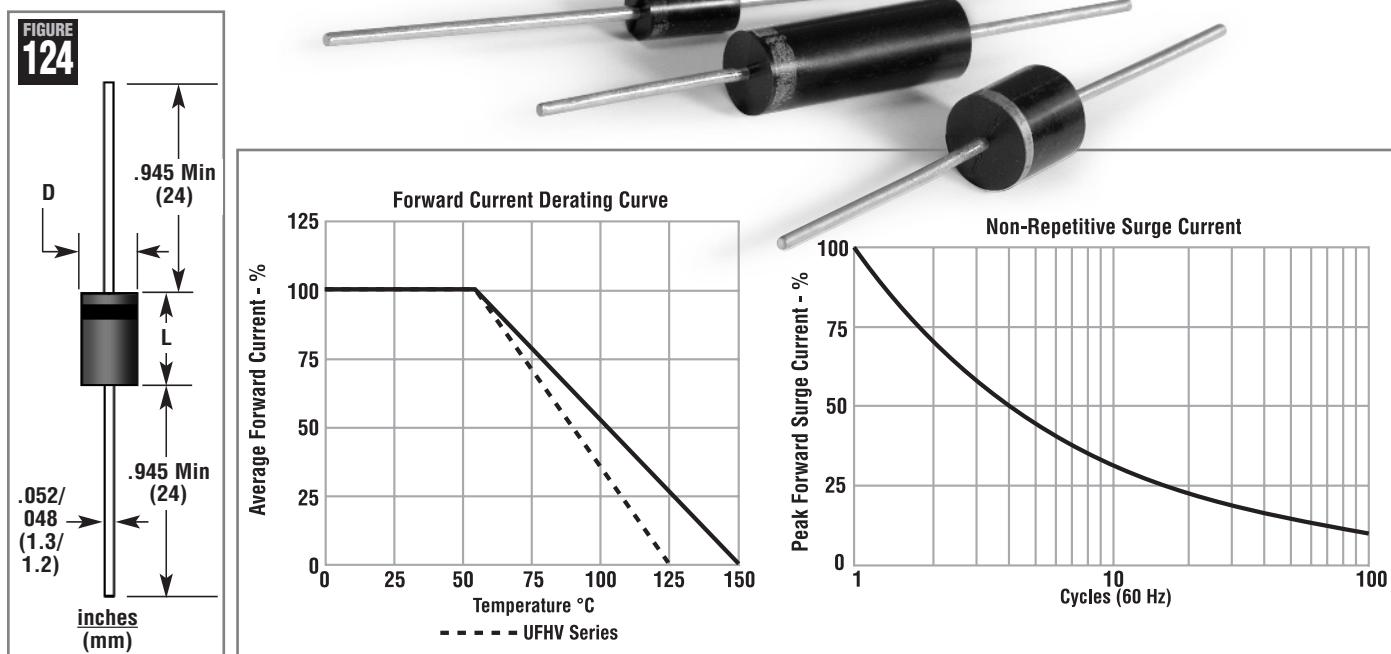


FIGURE  
124

HVCA Number	Repetitive Peak Reverse Voltage V <sub>RPM</sub> Per Leg V(Volts)	Avg. Forward Current Max I <sub>FAVM</sub> @55°C A(Amps)	Avg. Forward Voltage Drop V <sub>F</sub> @I <sub>FAVM</sub> V(Volts)	Max. Reverse Current I <sub>R</sub> @V <sub>RPM</sub> @25°C μA (microAmps)	Max. Surge Current I <sub>FSM</sub> (8.3ms) A (Amps)	Max. Reverse Recovery Time T <sub>RR</sub> (nsec)	Length L (inches)	Diameter D (inches)
<b>BR - High Voltage, Medium Current, Small Size</b>								
BR2	2000	1.0	2.4	5.0	40.0	-	0.354	0.197
BR4	4000	0.850	4.4	5.0	20.0	-	0.354	0.197
BR4F	4000	0.600	7.0	5.0	20.0	100	0.354	0.197
BR5F	5000	0.600	8.8	5.0	20.0	100	0.354	0.197
BR10F	10000	0.250	14.0	5.0	20.0	150	0.354	0.197

Figure 124

<b>HVW, HVRW - High Voltage, High Current, High Surge, Small Size - NOTE 1</b>						<b>Figure 124</b>		
HVW3	3000	2.0	3.0	5.0	300	-	0.36	0.36
HVRW1	1000	2.5	2.0	10.0	200	150	0.38	0.32
HVRW2	2000	1.5	4.0	10.0	200	150	0.38	0.32
HVRW3	3000	1.5	5.0	10.0	200	150	0.38	0.32
HVRW4	4000	1.0	6.0	10.0	200	150	0.38	0.32

Figure 124

<b>CL03 - High Voltage, Medium Current, Fast Recovery</b>						<b>Figure 124</b>		
CL03-8	8000	0.40	20	2.0	20	100	0.87	0.30
CL03-10	10000	0.30	25	2.0	20	100	0.87	0.30
CL03-12	12000	0.25	30	2.0	20	100	0.87	0.30
CL03-15	15000	0.20	35	2.0	20	100	0.87	0.30
CL03-20	20000	0.12	38	2.0	20	100	0.87	0.30

Figure 124

<b>2CL1 - High Voltage, Medium Current, Standard Recovery</b>						<b>Figure 124</b>		
2CL105	9000	0.450	10.0	2.0	30	-	0.87	0.30
2CL106	12000	0.450	12.0	2.0	30	-	0.87	0.30

<b>UFHV - High Voltage, Medium Current, Fast Recovery</b>						<b>Figure 124</b>		
UFHV2K	2000	.850	3.0	5.0	30	75	0.20	0.10
UFHV3K	3000	.825	4.5	5.0	30	75	0.20	0.10
UFHV4K	4000	.800	6.0	5.0	30	75	0.20	0.10

Note 1) HV Components suggests that a proper heatsink is used on the leads of this device to prevent damage from heating and to achieve maximum current capability