


# Rectifiers

AXIAL LEADED

HERMETICALLY SEALED

Part Number	Maximum Repetitive Peak Reverse Voltage (V <sub>RRM</sub> )	Average Forward Current Maximum (I <sub>FAVM</sub> )	Reverse Current @V <sub>RRM</sub> (Ir)	Forward Voltage (Vf)	1 Cycle Surge Current (Ifsm)	Maximum Reverse Recovery Time (Tr <sub>r</sub> )	Maximum Junction Temperature	Typical Junction Capacitance	Outline Size code
	kv	mA	25°C	100°C	V	A	nS	°C	pF
			µA	µA					
AH10-15G	15	100	2	50	26	10	80	125°C	2.5
PU10-15G	15	100	2	50	20	10	50	125°C	2.5

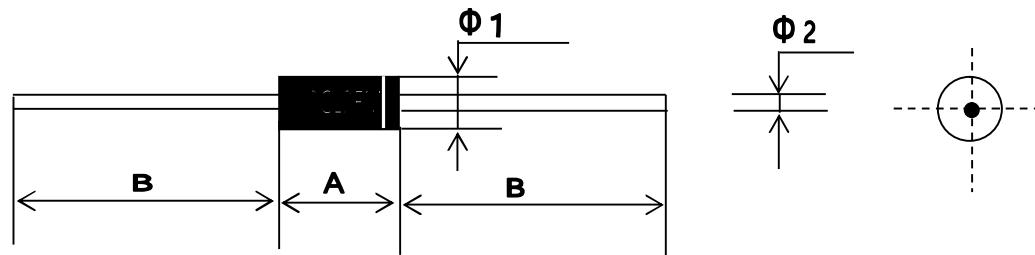

Outline Size code	A	B	Φ1	Φ2
G	15	>23	4.2	0.8

unit: (mm)